de Heus- XCMG
Stougjesdijk 153 3271 KB
Mijnsheerenland NL
info@heustractors.com
+31 (0) 186 61 2333

XCMG XE20E PRO

Fitted as standard with:

- Kubota Stage-V engine
- Hammer function
- Proportionally controlled demolition/sorting function
- Air conditioning
- Rubber tracks
- Dozer blade
- Heated cab with ROPS/TOPS certification
- 7" LCD operating display
- Adjustable auxiliary hydraulics (pressure & flow)
- Extendable undercarriage (990-1300 mm)
- Hydraulic system with variable pump

€28,100.00

Specifications

DIMENSIONS

8 ft digging depth with flat floor	2140
Chassis width	1300
Counterweight free space	449
Cradle base	1230
Ground clearance	230
Height of dozer blade	260 mm
Height of tracks	346
Height to top of roof	2558
Max cutting depth of dozer blade	230
Max. Digging depth	2140
Max. Digging height	3620
Max. Tipping height	2560
Max. Vertical digging depth	2000
Max. excavation radius	4120
Maximum lifting height of dozer blade	230
Maximum reach at GRP	4070
Min. forcing radius	1520
Minimum unloading height	628
Overall length with bin	3860
Overall width	1300
Tail swing radius	1100
Track length	1564
Track width	1564
Width of tracks	230
Width of upper structure	990

ENGINE

Cooling	Water

HYDRAULIC SYSTEM

Driving system pressure	2400
Main pressure safety valve	245
Main pump output	64.4
Steering pressure	35
Swing system pressure	110

HYDRAULIC SYSTEM OTHER	
Diesel tank	25
Hydro tank	20

TECHNICAL SPECIFICATIONS	
Arm digging force	8
Ground pressure	29.4
Max traction force	14
Max. Digging force	16
Rotation speed	8.5

WEIGHT	
Own weight	2150

Pictures

XE20E PRO

XCMG
XE20E PRO

XCMG
XE20E PRO

XCMG
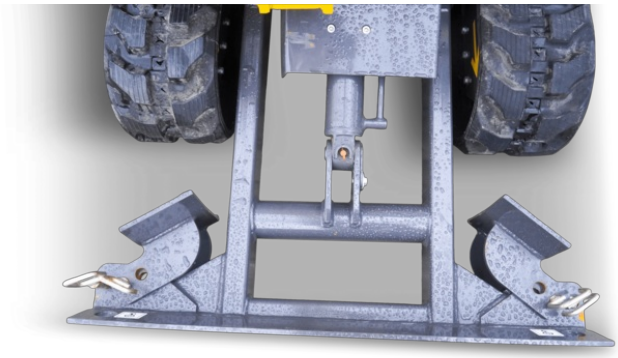
CAUTION
CAUTION